



Shenzhen OKD Technology Co.,Ltd

MKA20101

Make in Russia

Dry reed pipe principle



Dry reed pipe is dry tongue reed pipe abbreviation, is a kind of have the contact's passive electronic switch components, the structure is simple, easy to control the advantages of small size, its shell is generally a root sealed glass pipe, equipped with two iron in the flexibility of the reeds panels, still have a kind of call metal filling rhodium inert gases.

At ordinary times, in the tube by two special material made of reeds is separate when a magnetic material near the glass tube, the magnetic field lines, under the action of the tube, the two reeds be magnetized and attract each contact, reeds will suck together, make the circuit connected. The magnetic force disappeared after two reeds because of their stretch and separate, line is also is returned.

Characteristics and application

- 1, dry tongue reed pipe compact structure, small weight, can be installed in the extremely limited space, very suitable for miniaturization equipment.
- 2, dry tongue reed pipe of the switch components is hermetically sealed type in a inert gases in the atmosphere, never with the outside environment contact, long working life
- 3, dry tongue reed pipe not the sliding components, so will not occur in all the metal relegation metal fatigue phenomenon, ensure that in fact no limit of machinery service life
- 4, magnetic reed switch get a good application on the phone ,to the washing machine ,of SPC exchanges refrigerator ,camera disinfect ,cupboard door magnetic, window magnetic ,electromagnetic relays ,electron weighing ,apparatus level gauge ,gasometer, water meter, and so on .

Electrical parameters

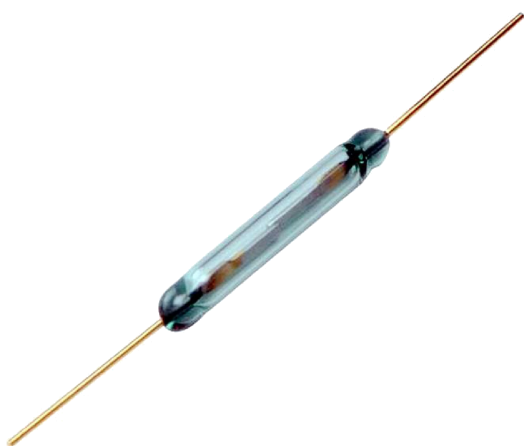

Exposure mode	A	
Maximum power	10W	50W
Maximum switching voltage	180 VDC	250 VDC
Minimum breakdown voltage	220 VDC	750 VDC
Maximum switching current	0.5 A	1.0 A
Maximum load current		
Maximum contact resistance	150 mΩ	
Minimum insulation resistance	$10^9 / 10^{10} \Omega$	
Action time	1.0 / 0.75 ms	
Bounce time		
Release time	0.3 ms	
Frequency response	2600 / 2100 HZ	
Maximum operating frequency	100 / 50 HZ	
Sensitivity value	10-40 / 20-40 AT	
Minimum reset value	4 / 8 AT	
Maximum contact capacitance	0.4 pF	
Electrical life	24V-250mA-1x10 ⁶ 5V-10mA-x10 ⁷	
Load	50V-1A-1x10 ⁵ 250V-10mA-1x10 ⁵	
Test coil	5000 T	
Turns	550 Ω	
Resistance		

Dry reed of the use of the matters needing attention

1, shear or bending dry reed pipe of the lead foot be extremely careful, lest exert not proper stress and make the glass-metal seal is damaged the appropriate clamping tools is must use

2, meet temperature and long exposure time could lead to glass-metal seal injury (craze, leakage, etc.), so must the rapid and reliable welding technology (process). Suggested the welding conditions for: the hand when welding 280 ~ 300 ° C, wave soldering when 250 to 300 ° C.

深圳欧卡达科技有限公司

Shenzhen OKD Technology Co.,Ltd

Add:Room 2009 Dingcheng international building
Zhonghang Road Futian District Shenzhen

Tel:0755-83661511 Fax:0755-83559755

Website:<http://www.sz-okd.com>

Email:szsokd@sina.com

QQ:137030453

